


Cirrus Stone Heaters

SAWO's Cirrus stone heaters are available in two models – Cirrus and the new trendy Cirrus Rock





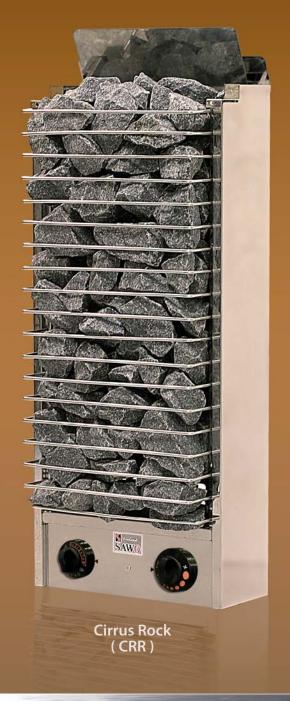





Cirrus Stone Heaters

Cirrus is a soapstone heater with a stylish slim design. Cirrus represents modern heater technology that combines Finnish soapstones and traditional sauna rocks. The heater's smart design and the uniquely designed soapstones with water pockets assures that a larger surface area of rocks comes in contact with the water, releasing more steam evenly throughout the sauna room.

The new Cirrus Rock is a modified model of Cirrus. With shorter safety distances the Cirrus Rock's robust design and stainless steel frame represents the new, trendy heaters with large volumes of sauna rocks. Likewise Cirrus, Cirrus Rock ensures that a larger surface area of rocks comes into contact with water, releasing more steam evenly in every direction.



Note: Sauna stones and decorative soap stone cubes a are not included.

Technical Data

Mo del Name	Power (kW)	Sauna Room(m3)		Supply Voltage	Fuse Size	Control	Size of Heater (mm)			Soapstones	Stones
		min	max		(Ampere)		Width	Depth	Height	(kg)	(kg)
CIR-30NB	3.0	2	4	220-240V 1N ~/ 380-415V 2N ~	1 x 1 6 2 x 1 0	8+4h	260	220	910	20	5
CRR-30NB								265			30
CIR-40NB	4.0	3	6	220-240V 1N ~/	1 x 2 0 2 x 1 0	8+4h	360	220	910	20	5
CRR-40NB								265		_	30
CIR-50NB	5.0	4	8	220-240V 1N~/	1 x 2 5 2 x 1 6	8+4h	360	220	910	20	5
CRR-50NB								265			30
CIR-45NB	4.5	3	6	380-415V 3N~	3 x 1 0	8+4h	505	220	910	31	8
CRR-45NB								265		—	51
CIR-60NB	6.0	5	8	380-415V 3N~	3 x 1 0	8+4h	505	220	910	31	8
CRR-60NB	0.0			300 1131 311	3 7 1 0	01 111	505	265	7.0		51
CIR-75NB	7.5	8	12	380-415V 3N~	3 x 1 6	8+4h	505	220	910	31	8
CRR-75NB		_						265		—	51
CIR-30NS	3.0	2	4	220-240V 1N ~/ 380-415V 2N ~	1 x 1 6 2 x 1 0	separate	360	220	910	20	5
CRR-30NS								265			30
CIR-40NS	4.0	3	6	220-240V 1N ~/	1 x 2 0 2 x 1 0	separate	360	220	910	20	5
CRR-40NS								265		_	30
CIR-50NS	5.0	4	8	220-240V 1N ~/	1 x 2 5 2 x 1 6	separate	360	220	910	20	5
CRR-50NS								265			30
CIR-45NS	4.5	3	6	380-415V 3N~	3 x 1 0	separate	505	220	910	31	8 51
CRR-45NS								265		<u> </u>	8
CIR-60NS	6.0	5	8	380-415V 3N~	3 x 1 0	separate	505	220	910	31	8 51
CRR-60NS								265			
CIR-75NS	7.5	8	12	380-415V 3N~	3 x 1 6	separate	505	220 265	910	31	8 51
CRR-75NS								265		_	51

